


INFRASTRUCTURE SERIES

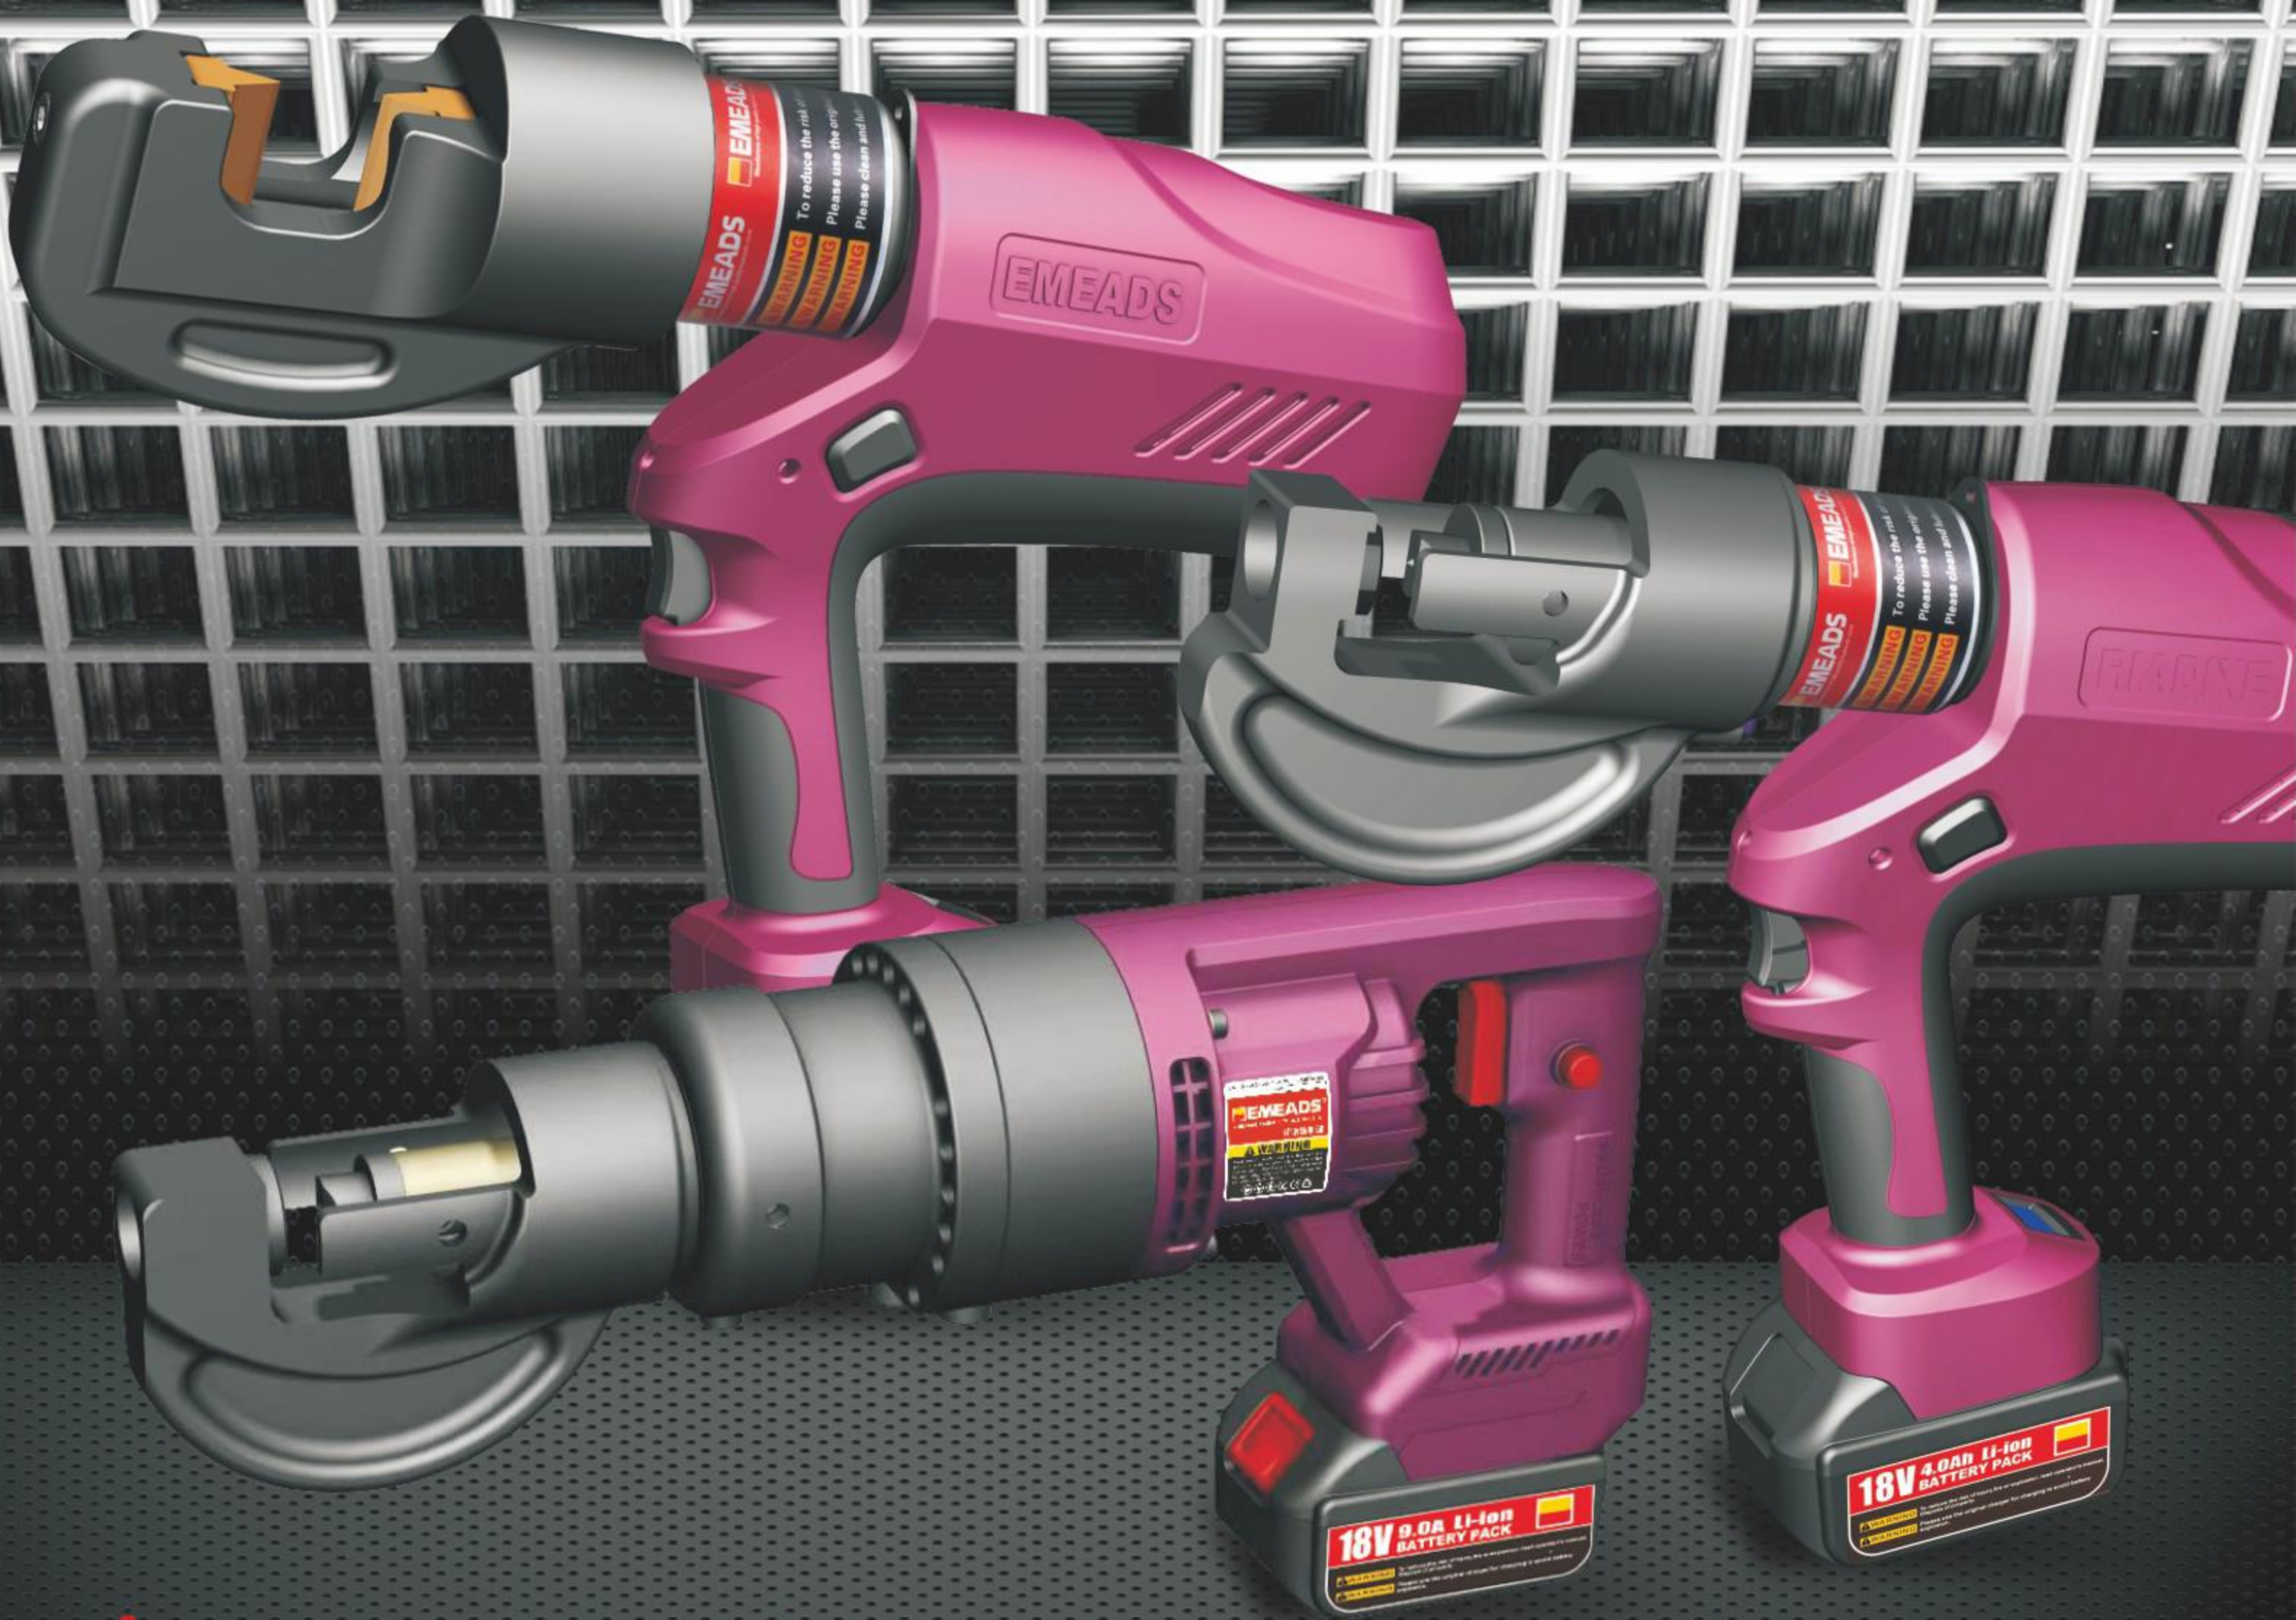

CRAFTED WITH PRECISION,
THE QUALITY CAN BE LEARNED

CHARGING TYPE HYDRAULIC PUNCHING MACHINE

EB-1220H

TECHNICAL DATA

Suitable for plates:	Copper aluminum plate, angle iron, stainless steel, channel steel
Punching thickness:	Iron plate angle iron channel steel ≤ 4mm; Copper bar and aluminum bar ≤ 8mm
Deep throat:	60mm
Charger voltage:	100-240VAC
Voltage/capacity:	18V/4.0Ah
Power:	12T
Charging time:	2 hours
Net weight:	7.5kg
Mould configuration:	8.5, 10.5, 13.5, 17.5mm
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



EB-1125H

TECHNICAL DATA

Suitable for plates:	Copper aluminum plate, angle iron, stainless steel, channel steel
Punching thickness:	Iron plate/channel steel (No. 8), angle steel ≤ 6mm, copper bar ≤ 10mm
Deep throat:	60mm
Charger voltage:	100-240VAC
Voltage/capacity:	18V/4.0Ah
Power:	25T
Charging time:	2 hours
Net weight:	10kg
Mould configuration:	6.5, 8.5, 11, 13, 17, 21, 25mm
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



EB-1220HG (Special for PV)

TECHNICAL DATA

Suitable for plates:	3mm inner photovoltaic U-shaped channel steel, angle steel 2.5mm stainless steel plate
Punching thickness:	< 5mm
Deep throat:	60mm
Charger voltage:	100-240VAC
Voltage/capacity:	18V/4.0Ah
Power:	12T
Charging time:	2 hours
Net weight:	6kg
Mould configuration:	10.5mm, 13.5mm, 2 pairs each
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



EBS-616B (Special for punching PV support)

TECHNICAL DATA	
Suitable for plates:	3mm inner photovoltaic U-shaped channel steel, angle steel 2.5mm stainless steel plate
Stroke:	18mm
Punching thickness:	< 5mm
Deep throat:	26mm
Charger voltage:	100-240VAC
Voltage/capacity:	18V/5.0Ah/9.0Ah optional
Power:	14T
Charging time:	4 hours
Net weight:	7kg
Mould configuration:	11mm, 13mm
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



EBS-616

TECHNICAL DATA	
Suitable for plates:	Copper aluminum plate, angle iron, stainless steel
Stroke:	18mm
Punching thickness:	Iron plate angle iron ≤ 5mm; Copper bar and aluminum bar ≤ 10mm
Deep throat:	26mm
Charger voltage:	100-240VAC
Voltage/capacity:	18V/5.0Ah/9.0Ah optional
Power:	14T
Charging time:	4 hours
Net weight:	7.5kg
Mould configuration:	6.5, 8.5, 11, 13, 17mm
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



CHARGING TYPE HYDRAULIC REBAR CUTTER

EBS-10



TECHNICAL DATA	
Max.output:	80KN
Stroke:	10mm
Cutting times:	200times (Per saturation voltage)
Voltage/capacity:	18V/4.0Ah
Net weight:	5.0kg
Charger voltage:	100-240VAC
Charging time:	2 hours
Cutting range:	2-10mm
Blade mold configuration:	2 pairs
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc

EBS-16



TECHNICAL DATA	
Max.output:	130KN
Stroke:	16mm
Cutting times:	200times (Per saturation voltage)
Voltage/capacity:	18V/4.0Ah
Net weight:	6.5kg
Charger voltage:	100-240VAC
Charging time:	2 hours
Cutting range:	2-16mm
Blade mold configuration:	2 pairs
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc

EBS-20

TECHNICAL DATA	
Max.output:	200KN
Stroke:	20mm
Cutting times:	150times (Per saturation voltage)
Voltage/capacity:	18V/4.0Ah
Net weight:	8.5kg
Charger voltage:	100-240VAC
Charging time:	2 hours
Cutting range:	2-20mm
Blade mold configuration:	2 pairs
Package:	Plastic box
ACCESSORIES	
Battery:	2pcs
Charger:	1pc



RA-16

NEW TYPE Rebar cutter, portable electric hydraulic rebar cutters are lighter, smaller, quiet portable and easily to operate, also it safe for the users as cutting without sparks, sediment, use for cutting off construction rebar, deformed bar, round steel bar, steel rod, threaded rod etc.

TECHNICAL DATA	
Voltage	220V/110V
Wattage	900W
Gross weight	11 kg
Net weight	6.8kg
Cutting speed	2.5-3.0s
Max rebar	16mm
Min rebar	4mm
Packing size	530 x 160 x 370mm
Machine size	450 x 130 x 180 mm



Package: one pc/Plastic box/Cardboard Ctn
Certificate: CE ROHS

RA-20

TECHNICAL DATA	
Voltage	220V/110V
Wattage	1200W
Gross weight	14 kg
Net weight	9.5kg
Cutting speed	3.0-3.5s
Max rebar	20mm
Min rebar	4mm
Packing size	530 x 160 x 370mm
Machine size	410 x 130 x 210 mm



Package: one pc/Plastic box/Cardboard Ctn
Certificate: CE ROHS

RA-25

TECHNICAL DATA	
Voltage	220V/110V
Wattage	1500W
Gross weight	26kg
Net weight	20kg
Cutting speed	5.0s
Max rebar	25mm
Min rebar	4mm
Packing size	565 x 230 x 345mm
Machine size	490 x 145 x 250mm



Package: one pc/Plastic box/Cardboard Ctn
Certificate: CE ROHS

PLUG-IN TYPE REBAR CUTTER

NRC-20

TECHNICAL DATA	
Voltage	220V/110V
Wattage	950/1300W
Gross weight	17 kg
Net weight	12.5kg
Cutting speed	3.0-3.5s
Max rebar	20mm
Min rebar	4mm
Packing size	575 x 280 x 165mm
Machine size	500 x 130 x 140mm



Package:one pc/Metal box/Cardboard Ctn
Certificate: CE ROHS

RC-16

TECHNICAL DATA	
Voltage	220V/110V
Wattage	850/900W
Gross weight	13 kg
Net weight	8kg
Cutting speed	2.5-3.0s
Max rebar	16mm
Min rebar	4mm
Packing size	510 x 230 x 150mm
Machine size	460 x 270 x 115mm



Package:one pc/Metal box/Cardboard Ctn
Certificate: CE ROHS PSE KC

RC-18

TECHNICAL DATA	
Voltage	220V/110V
Wattage	950/1250W
Gross weight	15 KGS
Net weight	8.5KGS
Cutting speed	4-5s
Max rebar dia	18MM
Min rebar dia	4MM
Carton size	550 x 270 x 150mm
Machine size	500 x 140 x 130mm



Package:One PC/Metal box/Cardboard Ctn
Certificate: CE Rohs

RC-20

TECHNICAL DATA	
Voltage	220V/110V
Wattage	950/1250W
Gross weight	18.3kg
Net weight	13kg
Cutting speed	3.0-3.5s
Max rebar	20mm
Min rebar	4mm
Packing size	480 x 195 x 280mm
Machine size	410 x 115 x 220mm



Package:one pc/Metal box/Cardboard Ctn
Certificate: CE ROHS

RC-22

Rebar cutter(RC),portable electric hydraulic rebar cutters are lighter,small,quiet protable and easily to operate,also it safe for the users as cutting without sparks,sediment,use for cutting off construction rebar,deformed bar,round steel bar,steel rod,threaded rod etc.

TECHNICAL DATA	
Voltage	220V/110V
Wattage	1000/1350W
Gross weight	21.5 kg
Net weight	15kg
Cutting speed	3.5-4.5s
Max rebar	22mm
Min rebar	4mm
Packing size	485 x 190 x 330mm
Machine size	420 x 120 x 230mm



Package:one pc/Meat box/Cardboard Ctn
Certificate: CE ROHS

RC-25

TECHNICAL DATA	
Voltage	220V/110V
Wattage	1600/1700W
Gross weight	32kg
Net weight	24.5kg
Cutting speed	5.0s
Max rebar	25mm
Min rebar	4mm
Packing size	565 x 230 x 345mm
Machine size	480 x 150 x 255mm



Package:one pc/Meat box/Cardboard Ctn
Certificate: CE ROHS PSE KC

RC-32

TECHNICAL DATA	
Voltage	220V/110V
Wattage	2900W/3000W
Gross weight	40kg
Net weight	31kg
Cutting speed	6-7s
Max rebar	32mm
Min rebar	6mm
Packing size	630 x 240 x 350mm
Machine size	520 x 170 x 270mm



Package:One PC/Meat box/Cardboard Ctn
Certificate: CE Rohs

PLUG-IN TYPE REBAR BENDER

RB-16 / NRB-22

TECHNICAL DATA	RB-16	NRB-22
Voltage	220V	220V
Wattage	900w	1200w
Cutting speed	4-5S	4-5S
Angle	0-130°	0-130°
Scope	4-16mm	4-22mm
Gross weight	16.5kg	21kg
Net weight	13.5kg	15kg



NRB-25A / NRB-25A-1

TECHNICAL DATA	
Voltage	220V
Wattage	1500w
Cutting speed	4-5S
Angle	0-130°
Scope	4-25mm
Gross weight	25kg
Net weight	15.5kg

Note: NRB-25A-1 includes straightening block



NRB-25B / NRB-25B-1

TECHNICAL DATA	
Voltage	220V
Wattage	1500w
Cutting speed	4-5S
Angle	0-130°
Scope	4-25mm
Gross weight	25kg
Net weight	15.5kg

Note: NRB-25B-1 includes straightening block

